

Round & E-Core Solenoids

SOLENOIDS

For Electronic Fuel Injection

Solenoids for single
fuel injection pumps



Solenoids for injectors



Solenoids for gas valves



SOLENOIDS

for Electronic Fuel Injection

In modern management systems for combustion engines increasing numbers of solenoid operated injectors and single fuel injection pumps are in use. Those components cover the requirements for fuel efficiency and emissions.

Beside complete valve systems Heinzmann offers solenoid systems with and without armature in a wide range of sizes and makes for all typical applications. In addition to standard types customised versions are also available. Magnetic forces range from 50 N to 800 N.

The robust and long lasting solenoid design guarantees a safe functionality during the component lifetime.

FEATURES

- ▶ High power density and efficiency
- ▶ Short opening and closing times
- ▶ Quick response of force
- ▶ Precise force adjustment
- ▶ Robustness and durability
- ▶ Diagnostic capability
- ▶ Easy system integration

APPLICATIONS

Control components for E-PNU, E-PPN and CR injection systems for diesel engines

- ▶ Fuel injectors
- ▶ Unit pumps
- ▶ Single high-pressure pumps

Control components for gas engine dosing systems

- ▶ Gas admission valves
- ▶ Gas shut-off valves
- ▶ Direct fuel injection valves

Hydraulic valves

- ▶ On-off valves

Special applications

- ▶ Robotics
- ▶ Automatisations

ROUND AND RECTANGULAR (E-CORE) VERSIONS AVAILABLE IN DIFFERENT POWER RANGES

Round solenoids


These pot solenoids have a closed, circular shape and ensure easy assembly. HEINZMANN round solenoids are available in a variety of sizes with solid or laminated cores.

Anchor plates and cable outlets are customer specific.



E-core solenoids

These rectangular solenoids have a characteristic E-shaped core made from laminated sheet package. Features of these solenoids are a very high density of the magnetic field and minimum loss of Foucault current. E-core solenoids are available in a variety of sizes and with customised anchor plates and cable outlets.

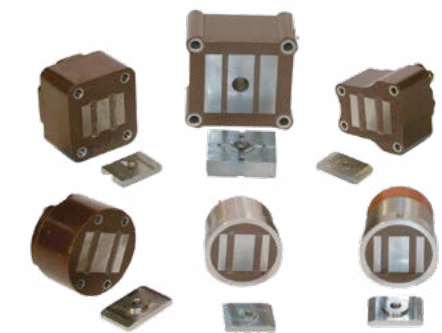

TECHNICAL DATA

Nominal voltage	90, 60, 42, 24 VDC
Voltage range	40 ... 110 VDC, 16 ... 33 VDC for rated voltage version 24 VDC
Hold current	2 up to 10 A
Current at life start	up to max. 27 A
Permitted hydraulic pressure	normal 0.5 bar max. 5.0 bar
Operating temperature range	-40 up to 130 °C
Storage temperature	-40 up to 150 °C

Operating stroke	up to 0.25 mm (optional for gas valve up to 1 mm)
Minimum air gap	0.05 mm
Protection class	IP66K
Contamination	Resistant to contaminants present in engine environment
Insulation resistance	10 MOhm at 500 VDC
Electric strenght	2500 AC (50/60 Hz) (only plug and socket connector)

ROUND SOLENOIDS

Solenoid RM 03

- Dimensions Ø 25 mm x 45 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 20 A
- Hold current 10 A
- Current rise time 0.15 ms
- Initial magnetic force 280 N

APPLICATIONS

- Diesel injectors



Solenoid RM 04

- Dimensions Ø 30 mm x 30 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.25 ms
- Initial magnetic force 350 N

APPLICATIONS

- Injectors for diesel and gas engines



Solenoid RM 05

- Dimensions Ø 38 mm x 45 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 5 A
- Hold current 3 A
- Current rise time 0.25 ms
- Initial magnetic force 350 N

APPLICATIONS

- High-pressure pumps



Solenoid RM 06

- Dimensions Ø 20 mm x 41 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 27 A
- Hold current 10 A
- Current rise time 0.25 ms
- Initial magnetic force 180 N

APPLICATIONS

- Diesel injectors



Solenoid RM 07

- Dimensions Ø 71 mm x 40 mm
- Control stroke 1.1 mm
- Minimum air gap 0.05 mm
- Start current 15 A
- 2 versions: laminated or solid solenoid core
- Hold current 1 A
- Current rise time 2.5 ms
- Initial magnetic force 650 N

APPLICATIONS

- Gas Valves



Solenoid RM 08

- Dimensions Ø 41 mm x 22 mm
- Control stroke 0.40 mm
- Minimum air gap 0.05 mm
- Start current 27 A
- Hold current 10 A
- Current rise time 0.25 ms
- Initial magnetic force 450 N

APPLICATIONS

- Diesel injectors
- High-pressure pumps



Solenoid RM 09

- Dimensions Ø 13.5 mm x 18 mm
- Control stroke 0.15 mm
- Minimum air gap 0.05 mm
- Start current 27 A
- Hold current 5 A
- Current rise time 0.25 ms
- Initial magnetic force 50 N

APPLICATIONS

- Diesel injectors



Solenoid RM 10

- Dimensions Ø 19 mm x 15 mm
- Control stroke 0.35 mm
- Minimum air gap 0.05 mm
- Start current 12 A
- Hold current 3 A
- Current rise time 0.20 ms
- Initial magnetic force 120 N

APPLICATIONS

- Gas valves
- Diesel injectors
- Dosing valves



E-CORE SOLENOIDS

Solenoid SM 04 / SM 04-S1

- Dimensions Ø 38 x 46 mm / Ø 40.5 x 42 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.20 ms / 0.40 ms
- Initial magnetic force 350 N

APPLICATIONS

- Diesel injectors
- Unit injection pumps



Solenoid SM 05

- Dimensions Ø 38 x 59 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 350 N

APPLICATIONS

- Robotics
- Actuating systems
- Hydraulic valves



Solenoid SM 06

- Dimensions Ø 46 x 51 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 370 N

APPLICATIONS

- Diesel injectors
- Unit injection pumps



Solenoid SM 07

- Dimensions (l/w/h) 44 x 48 x 56 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 350 N

APPLICATIONS

- Diesel injectors
- Unit injection pumps



Solenoid SM 08

- Dimensions Ø 38 x 42 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 300 N

APPLICATIONS

- Diesel injectors
- Unit injection pumps



Solenoid SM 09

- Dimensions (l/w/h) 63 x 59 x 48 mm
- Control stroke 0.40 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 800 N

APPLICATIONS

- Gas valves
- Unit injection pumps



Solenoid SM 10

- Dimensions (l/w/h) 42 x 45 x 47 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 300 N

APPLICATIONS

- Diesel injectors
- Unit injection pumps




Solenoid SM 13

- Dimensions Ø 46 x 78.3 mm
- Control stroke 0.20 mm
- Minimum air gap 0.05 mm
- Start current 25 A
- Hold current 10 A
- Current rise time 0.4 ms
- Initial magnetic force 350 N

APPLICATIONS

- Injectors with redundant control



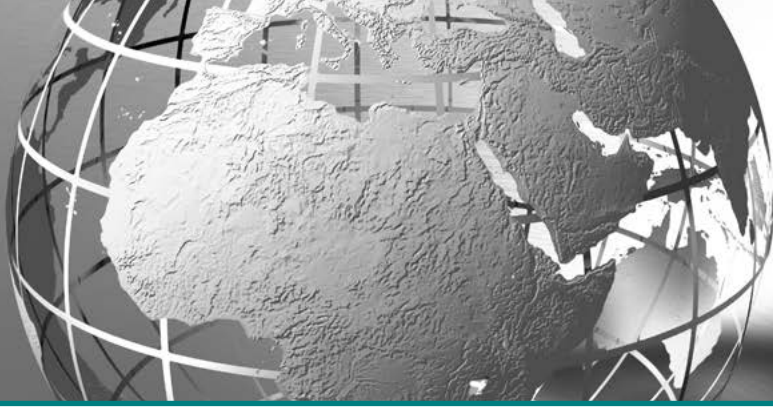

HEINZMANN GROUP – THINKING IN DRIVE AND CONTROL

HEINZMANN is a globally active family business founded in 1897 with its headquarters in Schönau (Germany), in the Black Forest.

Today, in the field of engine management HEINZMANN is one of the leading suppliers of components and systems for industrial combustion engines, generators and turbines. As a specialist and development partner, HEINZMANN is committed to developing exactly the right solution for increasing efficiency and reducing emissions.

In the Electric Drives division, HEINZMANN also demonstrates innovative strength and development expertise in engine technologies of the future. The company has established itself as a reliable partner and system provider for electric drive systems.

Our collaborative interaction with more than 40 globally active subsidiaries and sales companies characterizes the spirit within the HEINZMANN group of companies and makes us a reliable partner.

HEINZMANN SUBSIDIARIES

Headquarters HEINZMANN Group Germany

Germany

Heinzmann GmbH & Co. KG
Schönau

Phone +49 7673 8208-0
info@heinzmann.de
www.heinzmann.com

Australia

Heinzmann Australia Pty Ltd

Geebung QLD
Phone +61 7 3868 3333
info.au@heinzmann.com
www.heinzmann.com.au

China

Heinzmann Power Control (Jiaxing) Co. Ltd.

Jiashan
Phone +86 573 8466 1358
hzm-sh@heinzmann.com
www.heinzmann.cn

Germany
CPK Automotive GmbH & Co. KG

Münster
Phone +49 251 777 969-0
info@cpk-automotive.com
www.cpk-automotive.com

United Kingdom

Heinzmann UK Ltd.

Middlesbrough
Phone +44 1 642 467 484
info@heinzmannuk.com
www.heinzmann-turbine-controls.com

Regulateurs Europa Ltd.

Colchester
Phone +44 1206 799 556
sales@regulateurseuropa.com
www.regulateurseuropa.com

Giro Engineering Ltd.

Southampton, Hampshire
Phone +44 1489 885 288
giro@giroeng.com
www.giroeng.com

Korea

Heinzmann / Regulateurs Europa Korea Pte. Ltd.

Ulsan
Phone +82 52 227 7673
heinzmann@korea.com

The Netherlands

Regulateurs Europa B.V.

Roden
Phone +31 5050 19888
sales@regulateurs-europa.com
www.regulateurseuropa.com

Norway

Heinzmann Automation AS

Kleppestø
Phone +47 55 26 56 86
post@heinzmann.no
www.heinzmann.no

Austria

Heinzmann IFT GmbH

Uderns
Phone +43 5288 62258-0
office@heinzmann-ift.com
www.heinzmann-ift.com

South Africa

Heinzmann Südafrika

Stellenbosch
Phone +27 82 6898100
diemont@worldonline.co.za

Ukraine

Heinzmann / Regulateurs Europa

Kiev
Phone +38 44 331 96 75
hzm-kiev@hzm.com.ua

USA

Heinzmann / Regulateurs Europa America Inc.

Glendale Heights, IL
Phone +1 970 484 1863
info.usa@heinzmann.com